


## Using Our Hard-Wired Relays and Contactors with the Generac SMART A/C Module


### Compatibility Guarantee

All of our load shedding devices are fully field tested and **GUARANTEED** to be 100% compatible with any make or model generator or transfer switch. Should any properly connected device cause damage to or void a warranty on any generator or transfer switch we will pay the cost to repair the damage.

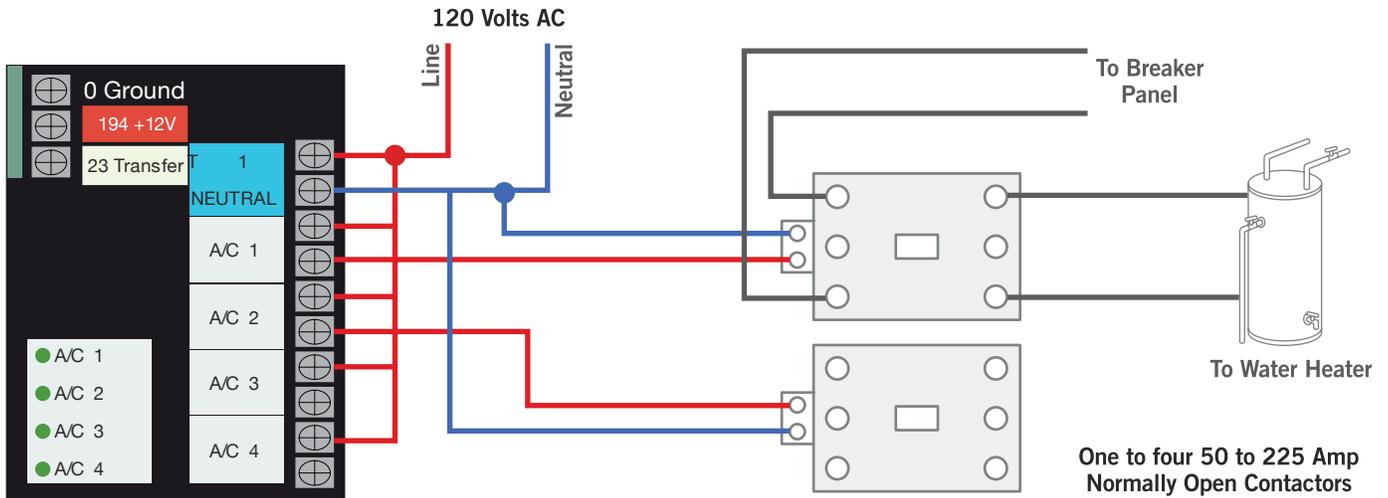


**Under normal conditions contactor is activated and load is energized.  
 Contactor is de-energized when load shedding is required.**

### 50/65/100 Amp Din-Rail Mounting Procedure

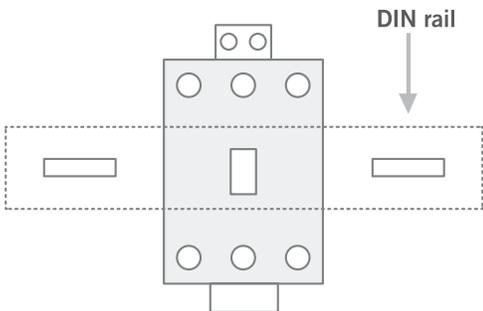

To attach contactor to din-rail insert flat bladed screw driver into slot and gently slide bar away from the contactor. Push down slightly on the contactor to lock in place on din rail.

### 125/180/225 Amp Bolt in Mount

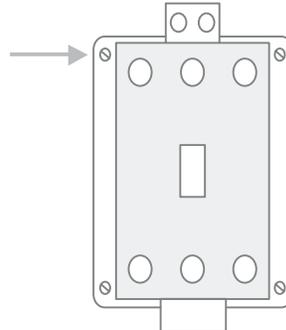

### VA Requirements

Model	Holding VA	In-Rush VA
LSC-50	18	25
LSC-65	22	30
LSC-100	25	35