

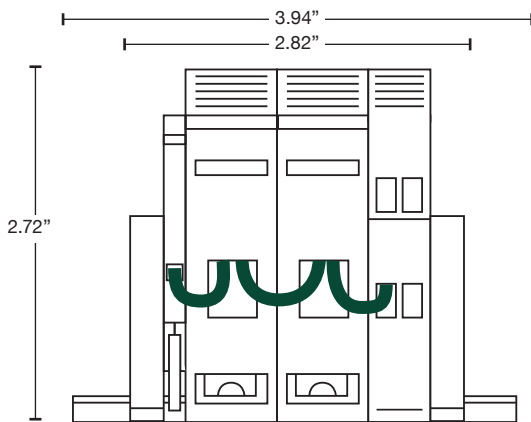


Generator Control Circuit Surge Protector

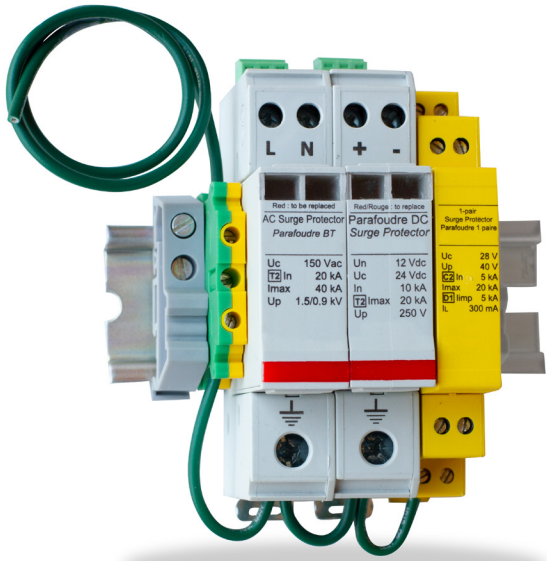


Features

- Designed to work with Kohler generators
- Protects charge circuit, 12 VDC power and RS485 data
- Installs at either (or both of) the generator and ATS
- DIN-rail mount for installation flexibility
- Multiple ground points for optimum performance
- Dry contacts for remote monitoring on power circuits
- 5 year warranty

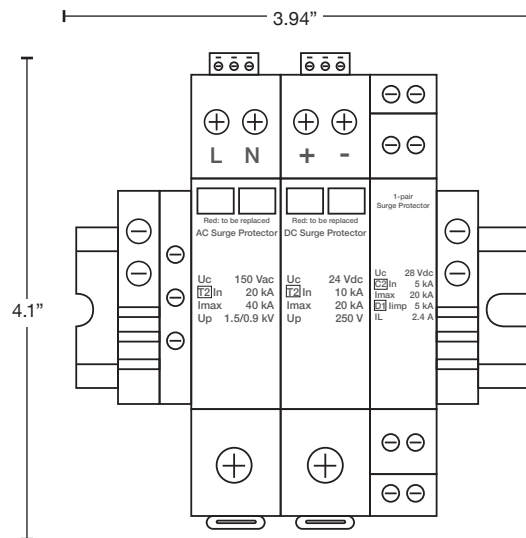

Description	Charge Circuit	12VDC Power	RS485 / RS232 Data
System Operating Voltage	120 VAC	12VDC	12V-24V Data
System Operating Current	20A	20A	2.4A
Maximum Continuous Operating Voltage (MCOV)	150 VAC	24VDC	28VDC
Nominal Discharge Current Per Mode (In)	20kA	10kA	5kA
Maximum Discharge Current (Imax) Per Mode	40kA	20kA	20kA
Thermal Disconnecter	Yes	Yes	No
Overload Disconnecter	Yes	Yes	No
Operating Temperature	-40 to +85°C		
Housing-Enclosure Material	ABS Plastic / UL94 V-0		
Mounting Type	DIN-Rail		
Environmental Rating	NEMA 1		
Connection Type	Screw Terminal		
Standards, Compliance or Recognition	UL Recognized Component, CSA	UL Recognized Component, UL497B Listed	UL497B Listed

Generator Control Circuit Surge Protector

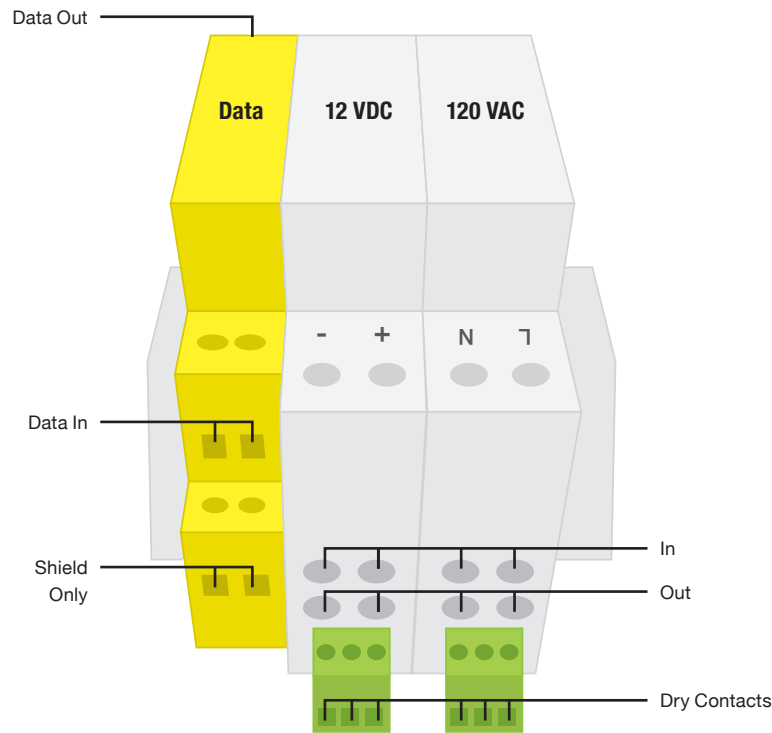

Important: Risk of electrical shock. This device should only be installed by qualified personnel.

Technical Assistance Call: 703-687-4057