



Dimensions

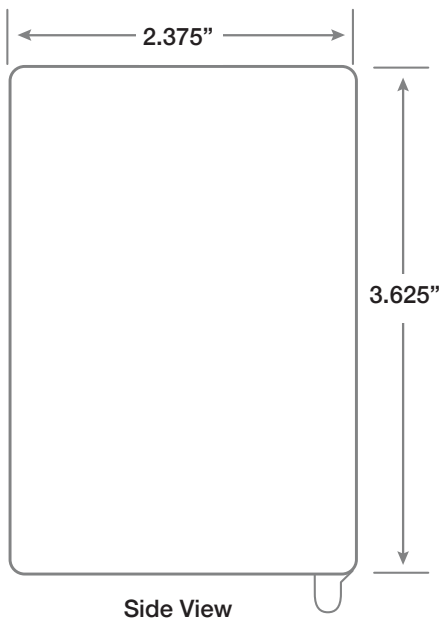

Features

- UL 1449 5th Edition, Type 1
- I_{max}: 100 kA per phase
- Thermally fused metal oxide varistor suppression with added Gas Tube technology
- Real-time per phase LED indicators and audible alarm
- NEMA 4X (IP66) indoor/outdoor rated enclosure
- I_n: 20 kA
- Short Circuit Current Rating (SCCR) 200 kAIC
- #12 AWG lead length: 18"
- Designed to allow installation inside of electrical box
- Lifetime warranty
- Flush mount option

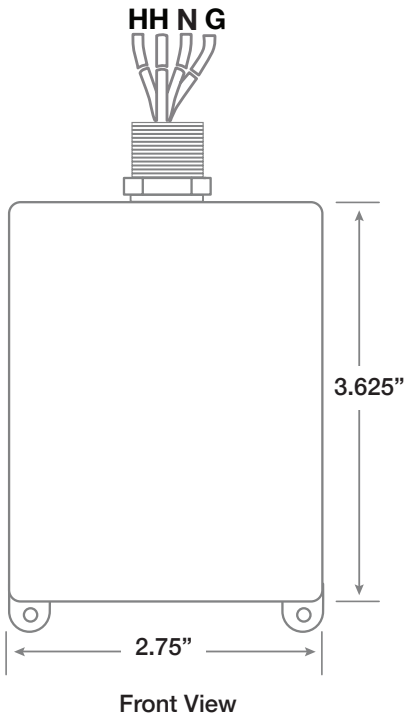

Specifications

System Voltage	120/240 VAC Single-Phase
Maximum Continuous Voltage (MCOV)	150 VAC L-G, 150 VAC L-N, 150 VAC N-G, 300 VAC L-L
Voltage Protection Rating (VPR)	700 VAC L-G, 700 VAC L-N, 700 VAC N-G, 1200 VAC L-L
Protection Modes	Line-Ground, Line-Neutral, Neutral-Ground, Line-Line
Nominal Discharge Current (I _n)	20 kA
Maximum Surge Capacity (I _{max})	100 kA Per Phase
Fault Current Rating (SCCR)	200 kAIC
Suppression Technology	Thermally Protected MOV / Gas Tube
Operating Temperature °C	-40°C - +80°C
Enclosure Type	NEMA 4X Indoor/Outdoor
Connection Type	Lead Length: 18" / #12 AWG
Standards	UL 1449 5th Edition Type 1 Listed, cUL Listed, IEEE IP 65, IEEE C62.41