




### Features

- Current range: 250A/500A
- Measure range: 5%–12%
- Power frequency: 45-65Hz
- Rated output: 0–5VDC
- Supply voltage: 12V
- Power consumption: <35mA
- Offset drift: @-25~+70°C ( $\leq \pm 1$ ) (mV/°C)
- Accuracy:  $\leq 1\%$
- Linearity:  $\leq \%FS$
- Response time:  $\leq 200ms$
- Galvanic isolation: AC, 1min 10kV
- Isolation resistance: @DC 500V 1000M $\Omega$
- Operating temperature: -25°C to +70°C
- Storage temperature: -40°C to +85°C
- Power supply not included

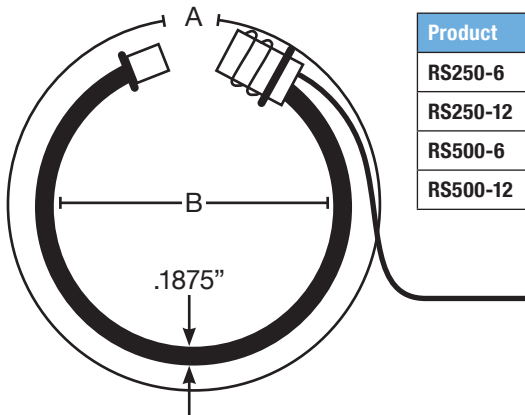

Product	A	B
RS250-6	6"	2"
RS250-12	12"	4"
RS500-6	6"	2"
RS500-12	12"	4"

