




Features

- 4:1 ultra wide input range
- -40~+85°C wide working temperature
- Rated current: 1.25A (HDR15-12), .63A (HDR15-24)
- Rated Power: 15W
- Input options: 100-240VAC
- Output options: 12V (HDR15-12) or 24V (HDR15-24)
- No minimum load required
- DC output adjustable ($\pm 10\%$)
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- Protections: short circuit, overload, over voltage, input reverse polarity, input under voltage protection
- 4KVdc I/O isolation (reinforced isolation)
- 3 year warranty

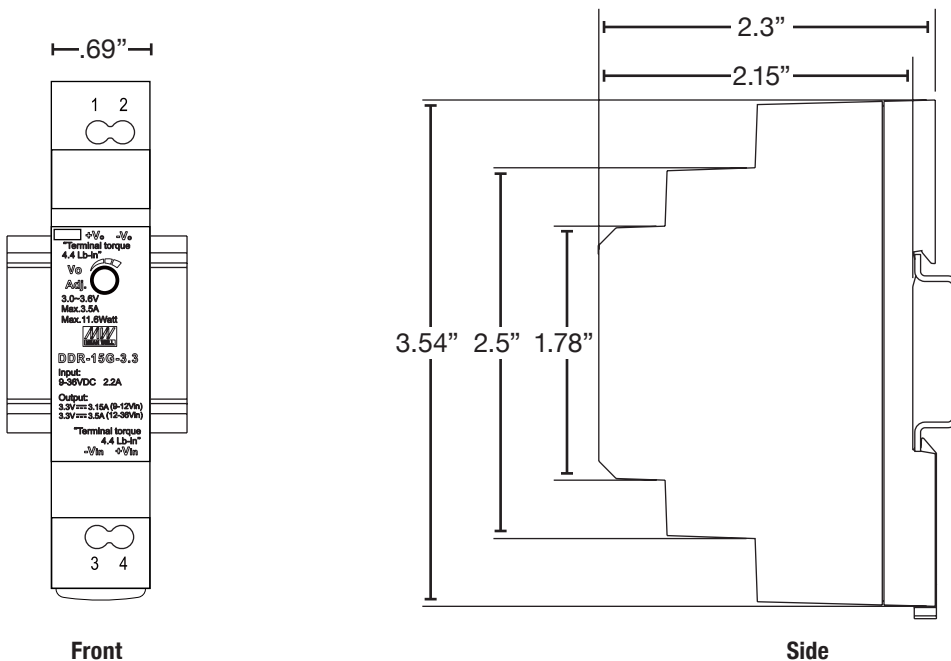

Terminal Pin No. Assignment

Pin No.	Assignment
1	DC Output +Vo
2	DC Output -Vo
3	DC Input -Vin
4	DC Input +Vin