


Universal Stand-Alone Load Shed Controller



Easy-to-Use 3 Button Programming Module with LCD display



Includes Dual CTs for Precision Load Shedding Control




Features


- Universal load shedding system works with ANY generator or transfer switch in managing 2-4 circuits from 20 to 100A each and up to 2 HVAC systems using low voltage circuits
- Field programmable using installer programming tool
- Utilizes CT inputs for precision load management and to reduce the possibility of overloading generators
- Program adjustments include: generator available amperage, start up delay, amperage of each load
- Utilizes magnetic latching relays eliminating the normal humming, chattering and heat associated with contactors
- Assembled in NEMA 1 steel enclosure; NEMA 3R raintight enclosure optional
- Compact flush mount version fits inside of studs and optional flush mount cover extends .75" past edge of can on all 4 sides for finished walls
- UL listed 508 control panel, UL listed to US and Canadian safety standards
- 2 year controller warranty, 5 year warranty on magnetic latching relays

Add-On Items


- 23–100KW requires CT Upgrade Kit PCB for liquid cooled generators – Item# Model-2274

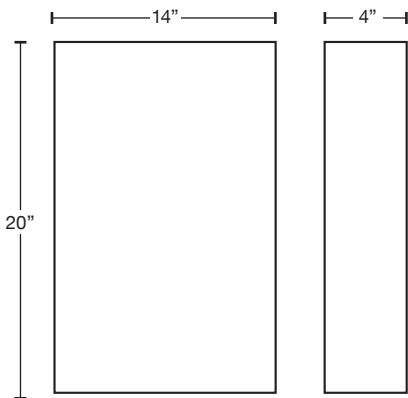

2 or 4 Relays, NEMA 1 Enclosure

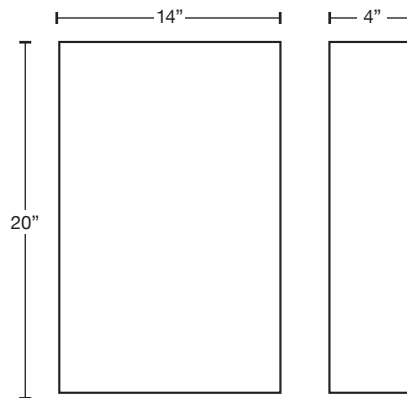

2 Relays, NEMA 3R Enclosure

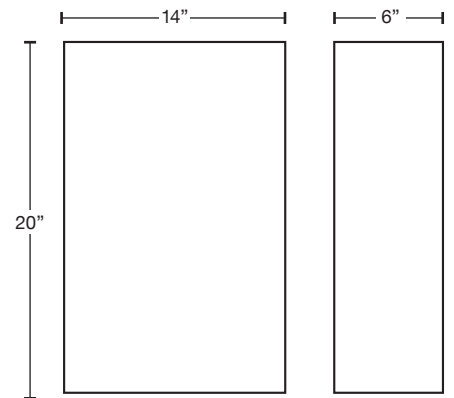

4 Relays, NEMA 3R Enclosure

Part Number Breakdown

(#)CX-100-(##)

• **Enclosure:** 01= NEMA 1 Steel, 3R= NEMA 3R Steel, SS= NEMA 4X Stainless Steel

• **Relays:** 2, 4